


# MOON R20


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA (V, 36V)**

**Power**  
Puissance  
Potencia  
**20W**



## Photometric diagrams

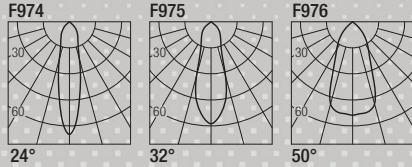

CCT	Flux	CRI
2700K	1659 lm	93
3000K	1752 lm	93
3500K	1873 lm	93
4000K	1925 lm	93

## Code Construction

Construction du code produit  
Construcción del código de producto

**MR2 | X | XX | 9 | X**


<b>MR2</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<b>1</b> White Blanc Blanco		<b>27</b> 2700K			<b>S</b> 24°
		<b>5</b> Black Noir Negro		<b>30</b> 3000K			<b>M</b> 32°
		<b>C</b> Custom Personnalisée Personalizado		<b>35</b> 3500K			<b>W</b> 50°
				<b>40</b> 4000K			
				<b>CU</b> Custom Personnalisée Personalizado			

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Serie wiring

Câblage en série  
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	CCPRO40-A Min. 1 Max. 1

**Low luminance louvre**  
Filtre basse luminace  
Filtro de baja luminancia


<b>LOH2</b>	<b>LOH2B</b>	<b>LOH2C</b>
White Blanc Blanco	Black Noir Negro	Custom Personnalisée Personalizado



## Accessories - Accessoires - Accesorios


### MQC003 Plasterboard recessing frame

Boîtier d'encastrement  
pour plaques de plâtre  
Cajetín para placas de yeso




Hole Cut:  
90mm  
(3.54")

**MP-R090**  
Mounting Plate  
with 90mm Hole



### T-Bar Installation


**R02090**  
Mounting Plate  
with 90mm Hole

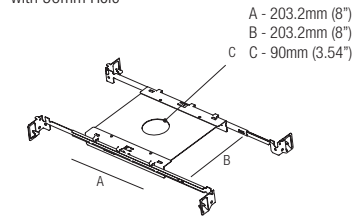

## IC Housings

**IC086R02090**  
Recessed Box for  
Insulated Ceiling  
with 90mm Hole

**AT086R02090**  
Air Tight Recessed  
Box for Insulated  
Ceiling with  
90mm Hole



## Optionals - Accessoires - Accesorios

### DCVI.B.2

24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 26W

