


OLU 2


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 2.9V)

Power
Puissance
Potencia
1.5W



Photometric diagrams

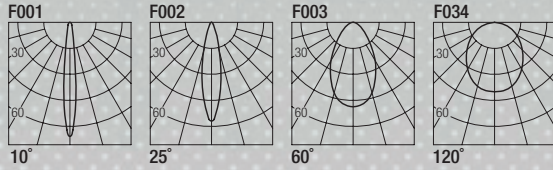

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

LU1 | X | XX | X |

LU1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz
		2 Aluminum Aluminium Aluminio		27 2700K		N 10°
		5 Black Noir Negro		30 3000K		S 25°
		6 Bronze Bronce		35 3500K		F 60°
		C Custom Personnalisée Personalizado		40 4000K		W 120°
				CU Custom Personnalisée Personalizado		


Drivers (Remote)

Alimentateurs
Alimentadores

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPRO10-A Min. 1 Max. 6	CCPRO40-A Min. 1 Max. 18

Series wiring

Câblage en série
Cableado en serie




For other driver options -
including Lutron, Dali and DMX -
please consult factory

Optionals - Accessoires - Accesorios

CP0022

Earth spike
Piquet de terre
Pico de la tierra



XNTC02

Aluminum
Aluminium
Aluminio

XNTC05

Black
Noir
Negro

XNTC06

Bronze
Bronce

Antiglare Snoot



Note: cable cut to measure on request
Note: câble sur mesure disponible sur demande
Nota: cable a medida disponible a petición