


OLU 6 POLE


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 8.7V)

Power
Pouissance
Potencia
4.5W



Photometric diagrams

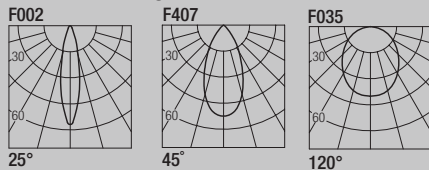

CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+
Dim to Warm 1800K-3000K	416 lm	90



Code Construction

Construction du code produit
Construcción del código de producto

LUP2 | X | XX | X | X | E |

LUP2	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz	E
		1 White Blanc Blanco		27 2700K	S 25°		
		5 Black Noir Negro		30 3000K	F 45°		
		9 COR-TEN		35 3500K	W 120°		
				40 4000K			
				CU Custom			


Note: cable cut to measure on request
Note: câble sur mesure disponible sur demande
Nota: cable a medida disponible a petición

Code Construction

Construction du code produit
Construcción del código de producto


PL | X | X |

PL	X	Finishing Finitions Acabados	X	Finishing Finitions Acabados
		A 415mm (16.33")		1 White Blanc Blanco
		B 615mm (24.21")		5 Black Noir Negro
		C 1215mm (47.83")		9 COR-TEN
		D 1615mm (63.58")		

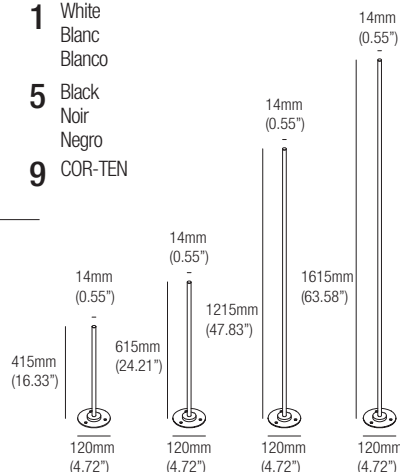


Drivers (Remote)

Alimentateurs
Alimentadores

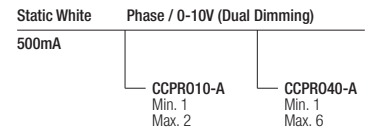


Series wiring

Câblage en série
Cableado en serie




For other driver options -
including Lutron, Dali and DMX -
please consult factory

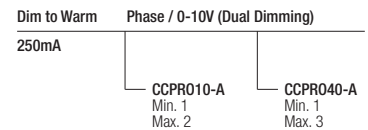

Optionals - Accessoires - Accesorios

ZCP001

Anchor bolt for concrete plinth



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

