

PLEXUS 10


design: Rod&Todd

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 18V)


Power
 Pouissance
 Potencia
10W

FLEXALIGHTING

NORTH AMERICA

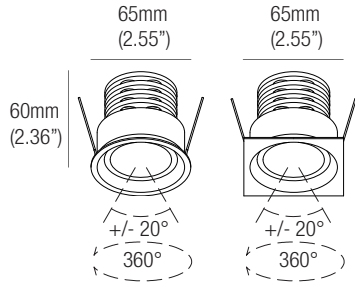

Photometric diagrams

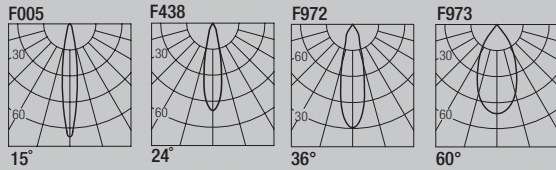

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto


PLX1 | X | X | XX | 9 | X

PLX1	X	Shape Forma Forme	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 Round Rond Redondo		1 White Blanc Blanco		24 2400K 27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm TW Tunable White CU Custom Personalisée Personalizado			N 15° S 24° M 36° W 60°
		2 Square Carré Cuadrado		5 Black Noir Negro					
				C Custom Personalisée Personalizado					

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring
 Câblage en série
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)	
400mA	CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3
Turnable White	Please consult factory for driver options	
500mA		


L101

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R060
 Mounting Plate
 with 60mm Hole



T-Bar Installation


R01060
 Mounting Plate
 with 60mm Hole



IC Housings

IC064R01060
 Recessed Box for
 Insulated Ceiling with
 60mm Hole

AT064R01060
 Air Tight Recessed Box
 for Insulated Ceiling with
 60mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1
 24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

