

PLEXUS 6


design: Rod&Todd

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 8.7V)


Power
 Pouissance
 Potencia
4.5W

FLEXALIGHTING

NORTH AMERICA

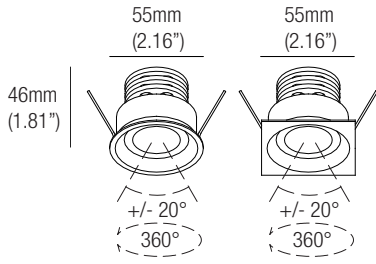

Photometric diagrams

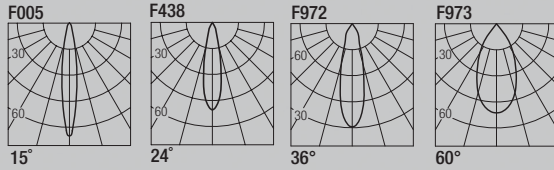

CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	416 lm	90

Code Construction

Construction du code produit
 Construcción del código de producto


PLX6 | X | X | XX | X |

PLX6	X	Shape Forma Forme	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz
		1 Round Rond Redondo		1 White Blanc Blanco		24 2400K		N 15°
		2 Square Carré Cuadrado		5 Black Noir Negro		27 2700K		S 24°
				C Custom Personnalisée Personalizado		30 3000K		M 36°
						35 3500K		W 60°
						40 4000K		
						DW Dim Warm		
						CU Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring
 Câblage en série
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White 500mA Phase / 0-10V (Dual Dimming)

CCPRO10-A	CCPRO40-A
Min. 1	Min. 1
Max. 2	Max. 6

Dim to Warm 250mA Phase / 0-10V (Dual Dimming)

CCPRO10-A	CCPRO40-A
Min. 1	Min. 1
Max. 2	Max. 3

L601

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia





Note: the filter must be ordered together with the lighting fixture
 Note: le filtre doit être commandé en même temps que l'appareil
 Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation

RO1051
 Mounting Plate
 with 51mm Hole


MP-R051
 Mounting Plate
 with 51mm Hole



IC Housings

IC064R01051
 Recessed Box for
 Insulated Ceiling
 with 51mm Hole

AT064R01051
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 51mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

