


PRINCE 36


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
24VDC

Power
Puissance
Potencia
10W

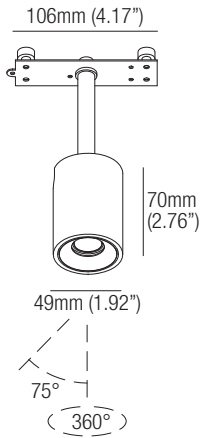

Photometric diagrams

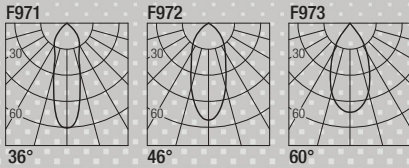

CCT	Flux	CRI
2400K	837 lm	98+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

PR36 | XX | 9 | X |


PR36	XX	Color Temp.	9	X	Beam angle
		Température couleur Temperatura de color			Angle de faisceau Ángulo del haz
		24 2400K		S	36°
		27 2700K		M	46°
		30 3000K		W	60°
		35 3500K			
		40 4000K			
		DW Dim Warm			
		CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Parallel wiring

Câblage en parallèle
Cableado en paralelo



Static White/DW 0-10V/Phase

CV2496A
Min. 1
Max. 9

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria