




IP RATED DOWNLIGHTS

# PUCK


design: Roberto Mantovani

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**350mA (V<sub>f</sub> 2.9V)**

**Power**  
 Pouissance  
 Potencia  
**1W**



## Photometric diagrams

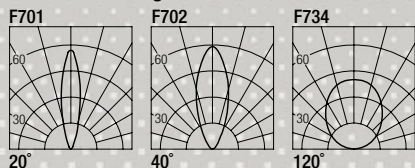

CCT	Flux	CRI
2700K	101 lm	90+
3000K	109 lm	90+
3500K	112 lm	90+
4000K	116 lm	85
Custom	TBD	

## Code Construction

Construction du code produit  
 Construcción del código de producto

**PK | X | X | XX | X |**


PK	X	Shape Forma Forme	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Finishing Finitions Acabados
		<b>1</b> Round Rond Redondo		<b>1</b> 20°		<b>27</b> 2700K		<b>B</b> White Blanc Blanco
		<b>2</b> Square Carré Cuadrado		<b>9</b> 120°		<b>30</b> 3000K		<b>G</b> Grey Gris
						<b>35</b> 3500K		<b>N</b> Black Noir Negro
						<b>40</b> 4000K		<b>K</b> COR-TEN
						<b>CU</b> Custom		<b>Z</b> INOX AISI 316L Steel Acier Acero

## Drivers

Alimentateurs  
 Alimentadores

## Series wiring

Câblage en série  
 Cableado en serie



0-10V

## FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming  
 Dimming Range: 0.01%  
**Min 1./Max. 18 Fixtures per Driver**

Phase

## FLEXA-12-350-CC-ELV

12W 350mA Constant Current  
 Dimming Range: 10%  
**Min. 2/Max. 7 Fixtures per Driver**

## FLEXA-16-350-CC-ELV

16W 350mA Constant Current  
 Dimming Range: 10%  
**Min 7./Max. 14 Fixtures per Driver**

Lutron Forward Phase

## LTEA.1

Hi-Lume Forward Phase  
 20W 350mA Constant Current  
 Dimming Range: 1%  
**Min. 3/Max. 12 Fixtures per Driver**

## LTEA.2

Hi-Lume Forward Phase  
 30W 350mA Constant Current  
 Dimming Range: 1%  
**Min. 12/Max. 18 Fixtures per Driver**


Lutron Ecosystem

## PEQ.1

Hi-Lume ECO System  
 20W 350mA Constant Current  
 Dimming Range: 1%  
**Min. 3/Max. 12 Fixtures per Driver**

## PEQ.0

Hi-Lume ECO System Premier  
 20W 350mA Constant Current  
 Dimming Range: 0.1%  
**Min. 3/Max. 12 Fixtures per Driver**

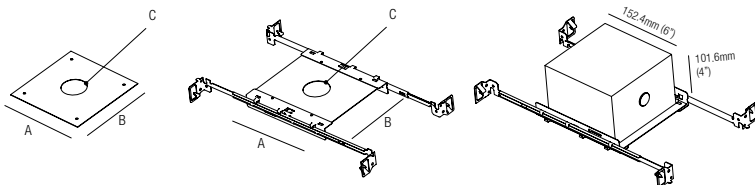

## R01025-WOA

Mounting Plate  
 with 25mm Hole

A - 152.4mm (6")  
 B - 152.4mm (6")  
 C - 25mm (0.98")

## R01025

Mounting Plate  
 with 25mm Hole

A - 152.4mm (6")  
 B - 152.4mm (6")  
 C - 25mm (0.98")

## IC064R01025

Recessed Box for Insulated Ceiling  
 with 25mm Hole

## AT064R01025


Air Tight Recessed Box for Insulated  
 Ceiling with 25mm Hole

## Optionals - Accessoires - Accesorios

### CSTY01

#### Recessing box

Boîtier d'encastrement  
 Caja de empotrar



**Note:** cable cut to  
 measure on request  
**Note:** câble sur  
 mesure disponible  
 sur demande  
**Nota:** cable a medida  
 disponible a petición