
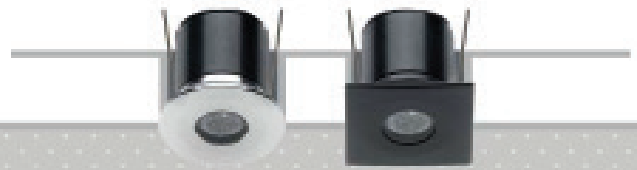


PUCK


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
350mA (V_f 2.9V)

Power
Puissance
Potencia
1W



Photometric diagrams

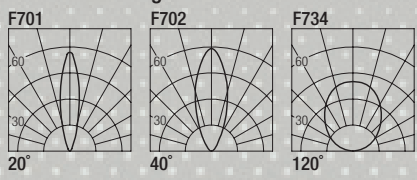

CCT	Flux	CRI
2700K	81 lm	93
3000K	81 lm	93
3500K	110 lm	93
4000K	107 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

PK | X | X | XX | X |

PK	X	Shape Forma Forme	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Finishing Finitions Acabados
	1	Round Rond Redondo	1	20°	27	2700K	B	White Blanc Blanco
	2	Square Carré Cuadrado	9	120°	30	3000K	N	Black Noir Negro
					35	3500K	K	COR-TEN
					40	4000K	Z	INOX AISI 316L Steel Acier Acero
					CU	Custom Personnalisée Personalizado	C	Custom Personnalisée Personalizado


Drivers (Remote)

Alimentateurs
Alimentadores

Static White	Phase / 0-10V (Dual Dimming)
350mA	CCPRO10-A Min. 1 Max. 9
	CCPRO40-A Min. 1 Max. 18

Series wiring

Câblage en série
Cableado en serie




For other driver options - including Lutron, Dali and DMX - please consult factory


Optionals - Accessoires - Accesorios

CSTY01

Recessing box
Boîtier d'encastrement
Caja de empotrar




MP-R025
Mounting Plate
with 25mm Hole



T-Bar Installation


RO1025
Mounting Plate
with 25mm Hole

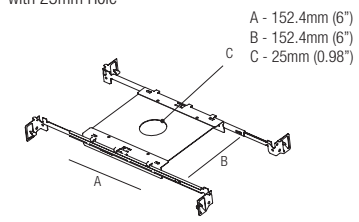

IC Housings

IC064R01025
Recessed Box for
Insulated Ceiling
with 25mm Hole

AT064R01025
Air Tight Recessed
Box for Insulated
Ceiling with
25mm Hole



Note: cable cut to measure on request
Note: câble sur mesure disponible sur demande
Nota: cable a medida disponible a petición