


PUFF


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
250mA (V_i 8.7V)

Power
Puissance
Potencia
2W

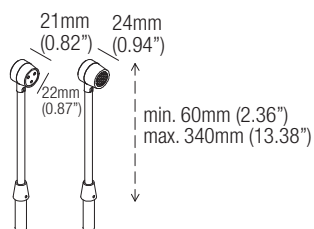

Photometric diagrams

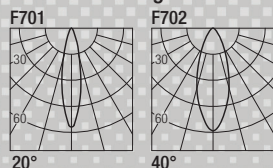

CCT	Flux	CRI
2700K	178 lm	93
3000K	186 lm	93
3500K	194 lm	93
4200K	206 lm	93



Code Construction


Construction du code produit
Construcción del código de producto

PU_|X_|X_|XX_|X_|

PU	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Low luminance louvre Filtre basse luminace Filtro de baja luminancia
		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado		1 18° 2 40°		27 2700K 30 3000K 35 3500K 42 4200K CU Custom Personnalisée Personalizado		L Yes Oui Sí 0 No Non


Drivers (Remote)

Alimentateurs
Alimentadores

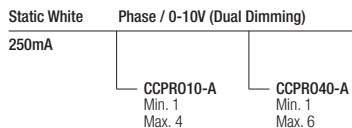

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory