


# RAÙL 10


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA (V<sub>f</sub> 18V)**

**Power**  
Puissance  
Potencia  
**10W**

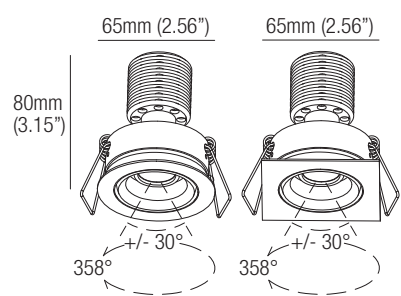

**Photometric diagrams**

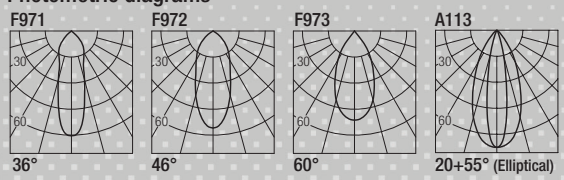

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

**Code Construction**


Construction du code produit  
Construcción del código de producto

R1 | X | X | XX | 9 | X |

<b>R1</b>	<b>X</b>	<b>Shape</b> Forma Forme	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		1 Round Rond Redondo		1 White Blanc Blanco		27 2700K			S 36°
		2 Square Carré Cuadrado		5 Black Noir Negro		30 3000K			M 46°
				C Custom Personnalisée Personalizado		35 3500K			W 60°
						40 4000K			D 20+55° (Elliptical)
						DW Dim Warm			
						CU Custom Personnalisée Personalizado			


**Drivers (Remote)**

Alimentateurs  
Alimentadores


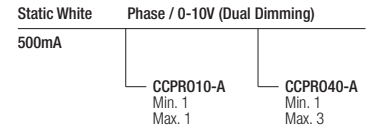


**Series wiring**

Câblage en série  
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

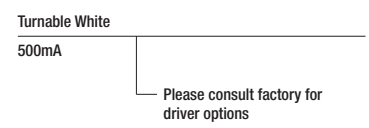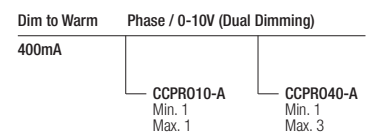

**Optionals - Accessoires - Accesorios**

**IC Housings**

**IC064R01060**  
Recessed Box for Insulated Ceiling with 60mm Hole

**AT064R01060**  
Air Tight Recessed Box for Insulated Ceiling with 60mm Hole

