


# RAÙL 10 TRIMLESS


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA (V<sub>i</sub> 18V)**

**Power**  
Puissance  
Potencia  
**10W**



**Photometric diagrams**

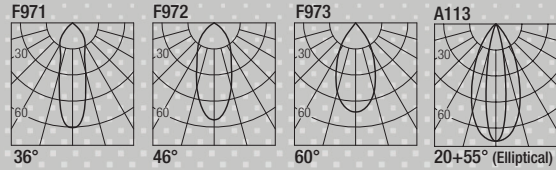

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

**Code Construction**

Construction du code produit  
Construcción del código de producto

**RT1 | X | XX | 9 | X |**


<b>RT1</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<b>1</b> White Blanc Blanco		<b>27</b> 2700K			<b>S</b> 36°
		<b>5</b> Black Noir Negro		<b>30</b> 3000K			<b>M</b> 46°
		<b>C</b> Custom Personnalisée Personalizado		<b>35</b> 3500K			<b>W</b> 60°
				<b>40</b> 4000K			<b>D</b> 20+55° (Elliptical)
				<b>DW</b> Dim Warm			
				<b>CU</b> Custom Personnalisée Personalizado			

**Drivers (Remote)**


Alimentateurs  
Alimentadores

**Series wiring**

Câblage en série  
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

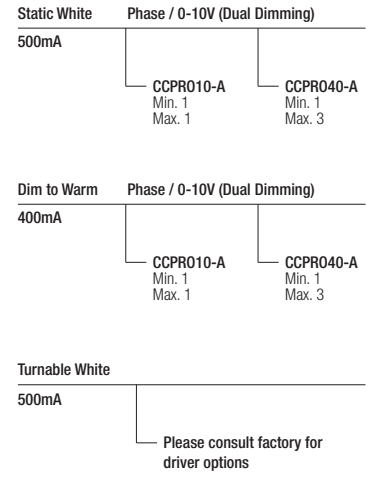

**Optionals - Accessoires - Accesorios**

**IC Housings**

**IC064R01090**

Recessed Box for Insulated Ceiling with 90mm Hole

**AT064R01090**

Air Tight Recessed Box for Insulated Ceiling with 90mm Hole

