


RAÙL 10 UGR


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 18V)

Power
Pouissance
Potencia
10W



Photometric diagrams

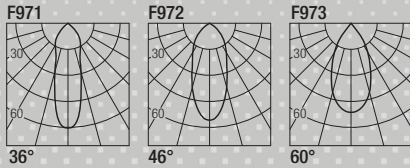

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

RU1 X XX 9 X


RU1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
	1	White Blanc Blanco		27 2700K		S	36°
				30 3000K		M	46°
	5	Black Noir Negro		35 3500K		W	60°
				40 4000K		D	20+55° (Elliptical)
	C	Custom Personnalisée Personalizado		DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)		
	<table border="1"> <tr> <td>CCPR010-A Min. 1 Max. 1</td> <td>CCPR040-A Min. 1 Max. 3</td> </tr> </table>	CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3
CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3		
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)		
	<table border="1"> <tr> <td>CCPR010-A Min. 1 Max. 1</td> <td>CCPR040-A Min. 1 Max. 3</td> </tr> </table>	CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3
CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3		
Turnable White 500mA	Please consult factory for driver options		

Optionals - Accessoires - Accesorios

IC Housings

IC086R02080
Recessed Box for
Insulated Ceiling
with 90mm Hole

AT086R02080
Air Tight Recessed
Box for Insulated
Ceiling with
90mm Hole

