


RAÙL 10 UGR


design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 18V)

Power
 Pouissance
 Potencia
10W

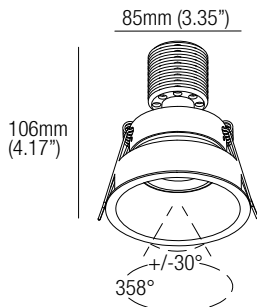

Photometric diagrams

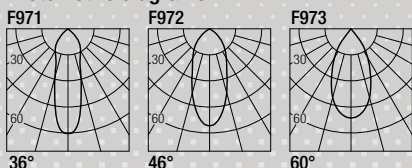

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
† Dim Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

RU1 | X | XX | 9 | X


RU1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
	1	White Blanc Blanco	27	2700K		S	36°
	2	Grey Gris	30	3000K		M	46°
	5	Black Noir Negro	35	3500K		W	60°
			40	4000K			
			DW	Dim Warm † @ 420mA			

Drivers

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
 Dimming Range: 0.1%
Min. 1/Max. 3 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current
 Dimming Range: 10%
Min. 1/Max. 1 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
 Dimming Range: 10%
Min. 2/Max. 2 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.2

Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 1/Max. 2 Fixtures per Driver

LTEA.3

Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 2/Max. 3 Fixtures per Driver

Lutron Ecosystem

LDE.1


Hi-Lume Ecosystem
 500mA Constant Current
 Dimming Range: 1%
Min. 1/Max. 1 Fixtures per Driver

LDE.2

Hi-Lume Ecosystem Premier
 500mA Constant Current
 Dimming Range: 1%
Min. 2/Max. 2 Fixtures per Driver

MP-R080


Mounting Plate
 with 80mm Hole

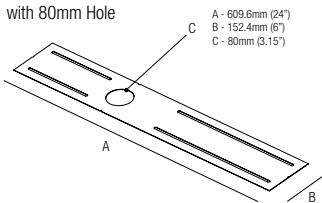

T-BAR Installation

RO1080

Mounting Plate
 with 80mm Hole

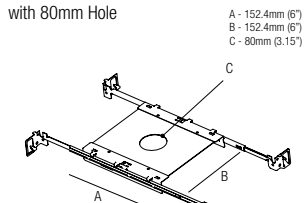


IC Housings

IC064R01080

Recessed Box for
 Insulated Ceiling with
 80mm Hole

AT064R01080

Air Tight Recessed Box
 for Insulated Ceiling with
 80mm Hole

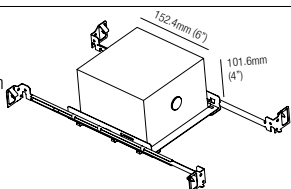

Optionals - Accessoires - Accesorios

Low luminance louvre

Filtre basse luminance
 Filtro de baja luminancia



LOH1

White
 Blanc
 Blanco

LOH1B

Black
 Noir
 Negro

LOH1G

Grey
 Gris