


# SASHA 150 DISPLAY

design: Lapo Grassellini

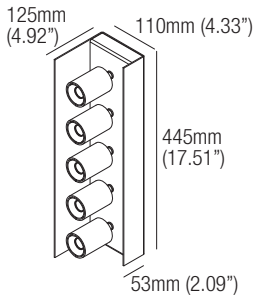


**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**350mA** (V<sub>i</sub> 5 x 18V)

**Power**  
 Pouissance  
 Potencia  
**5 x 6.5W**

**FLEXALIGHTING**  
 NORTH AMERICA



## Photometric diagrams

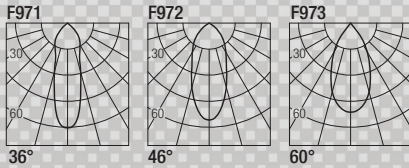

CCT	Flux <sub>(x5)</sub>	CRI
2700K	690 lm	98+
3000K	770 lm	98+
3500K	780 lm	98+
4000K	790 lm	98+



## Code Construction

Construction du code produit  
 Construcción del código de producto


**SD15.XXX.9.X**

<b>SD15</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<b>1</b> White Blanc Blanco		<b>27</b> 2700K			<b>S</b> 36°
		<b>5</b> Black Noir Negro		<b>30</b> 3000K			<b>M</b> 46°
		<b>C</b> Custom Personnalisée Personalizado		<b>35</b> 3500K			<b>W</b> 60°
				<b>40</b> 4000K			
				<b>CU</b> Custom Personnalisée Personalizado			


## Drivers (Remote)

Alimentateurs  
 Alimentadores

**Series wiring**  
 Câblage en série  
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

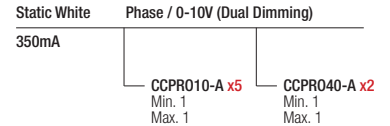

**DCVI.B.1**  
 24VDC Constant Voltage to  
 Constant Current Converter  
 0-10V / Phase / Dim to Warm  
 Compatible, 13W

