


SEXUS 10

design: Rod&Todd




Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V, 18V)

Power
 Pouissance
 Potencia
10W



Photometric diagrams

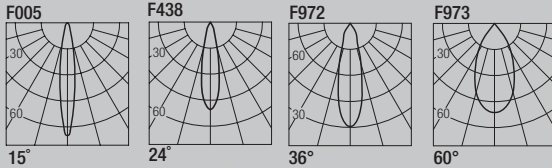

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto


SX1 | X | XX | 9 | X |

SX1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K			N 15°
		5 Black Noir Negro		27 2700K			S 24°
		C Custom Personnalisée Personalizado		30 3000K			M 36°
				35 3500K			W 60°
				40 4000K			
				DW Dim Warm			
				TW Tunable White			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring
 Câblage en série
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)	
400mA	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
Turnable White	Please consult factory for driver options	
500mA		

L101

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation

R01070
 Mounting Plate
 with 70mm Hole


MP-R070
 Mounting Plate
 with 70mm Hole

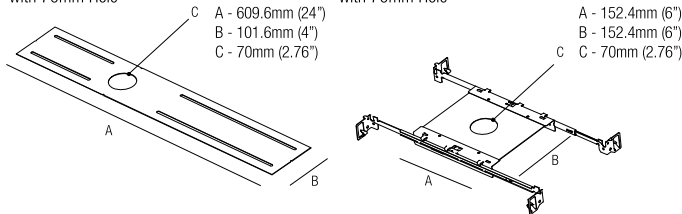

IC Housings

IC064R01070
 Recessed Box for Insulated Ceiling with 70mm Hole


AT064R01070
 Air Tight Recessed Box for Insulated Ceiling with 70mm Hole



Accessories - Accessoires - Accesorios

ZQS002


Plasterboard recessing frame
 Boîtier d'encastrement pour plaques de plâtre
 Cajetín para placas de yeso



Hole Cut:
 70mm (2.75")

ZQS002.BMK

Backmount frame
 Pierre/bois montage arrière
 Roca/madera montaje trasero



Hole Cut:
 61mm (2.40")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

