


SEXUS 10 UGR

design: Rod&Todd

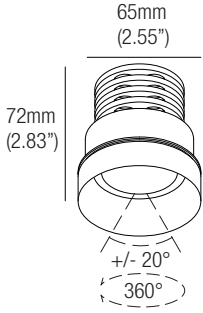

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V, 18V)


Power
 Pouissance
 Potencia
10W

FLEXALIGHTING

NORTH AMERICA



Photometric diagrams

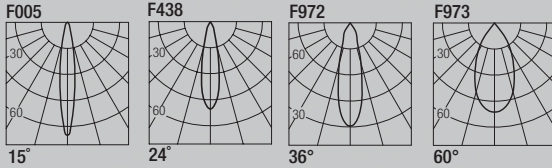

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

SX1 X | XX | 9 | X


SXU1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		<p>1 White Blanc Blanco</p> <p>5 Black Noir Negro</p> <p>C Custom Personnalisée Personalizado</p>		<p>24 2400K</p> <p>27 2700K</p> <p>30 3000K</p> <p>35 3500K</p> <p>40 4000K</p> <p>DW Dim Warm</p> <p>TW Tunable White</p> <p>CU Custom Personnalisée Personalizado</p>			<p>N 15°</p> <p>S 24°</p> <p>M 36°</p> <p>W 60°</p>

Drivers (Remote)

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	<p>CCPR010-A Min. 1 Max. 1</p> <p>CCPR040-A Min. 1 Max. 3</p>
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	<p>CCPR010-A Min. 1 Max. 1</p> <p>CCPR040-A Min. 1 Max. 3</p>
Tunable White 500mA	
	Please consult factory for driver options


L101

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R075
 Mounting Plate
 with 75mm Hole

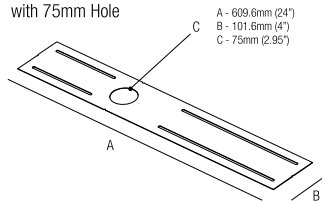

T-Bar Installation


R01075
 Mounting Plate
 with 75mm Hole

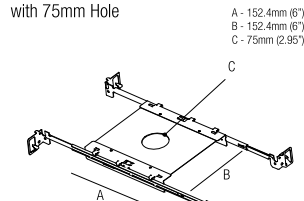

IC Housings

IC064R01075
 Recessed Box for
 Insulated Ceiling with
 75mm Hole


AT064R01075
 Air Tight Recessed Box
 for Insulated Ceiling with
 75mm Hole

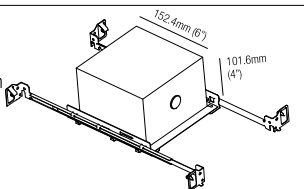

Accessories - Accessoires - Accesorios

ZQSU002


**Plasterboard
 recessing frame**
 Boîtier d'encastrement
 pour plaques de plâtre
 Cajetín para placas de yeso



Hole Cut:
 75mm (2.95")

ZQSU002.BMK

Backmount frame
 Pierre/bois montage arrière
 Roca/madera montaje trasero



Hole Cut:
 66mm (2.59")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

