


SLOT 6


design Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 8.7V)

Power
Puissance
Potencia
4.5W



Photometric diagrams

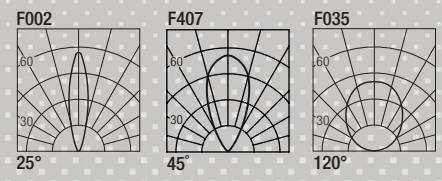

CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	416 lm	90

Code Construction

Construction du code produit
Construcción del código de producto

SL6 | X | XX | X | E |


<p>SL6</p>	<p>X</p> <p>Finishing Finitions Acabados</p> <p>B White Blanc Blanco</p> <p>N Black Noir Negro</p> <p>K COR-TEN</p> <p>Z INOX AISI 316L Steel Acier Acero</p> <p>C Custom Personnalisée Personalizado</p>	<p>XX</p> <p>Color Temp. Température couleur Temperatura de color</p> <p>24 2400K</p> <p>27 2700K</p> <p>30 3000K</p> <p>35 3500K</p> <p>40 4000K</p> <p>DW Dim to Warm</p>	<p>X</p> <p>Beam angle Angle de faisceau Angulo del haz</p> <p>S 25°</p> <p>M 45°</p>
-------------------	--	---	---

Drivers (Remote)



Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

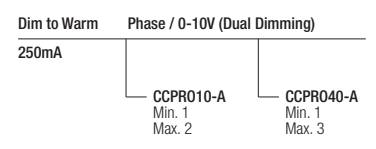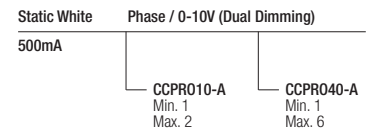

L001


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R060


Mounting Plate
with 60mm Hole

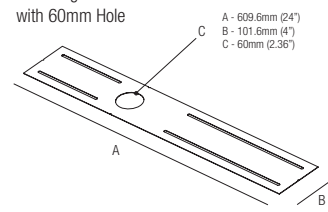

T-Bar Installation

R02060


Mounting Plate
with 60mm Hole

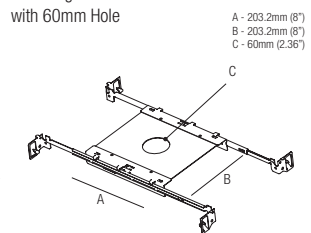

Optionals Accessoires Accesorios


CSXJ01

Recessing box
Boîtier d'encastrement
Caja de empotrar



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



IC Housings

IC086R02060

Recessed Box for
Insulated Ceiling with
60mm Hole

AT086R02060

Air Tight Recessed Box
for Insulated Ceiling with
60mm Hole

