


SOREL


design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_I 2.9V)


Power
 Pouissance
 Potencia
1.5W



Photometric diagrams



CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4200K	154 lm	93

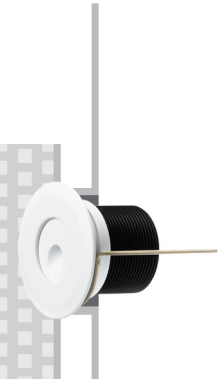

Code Construction

Construction du code produit
 Construcción del código de producto

NP1 X 0 XX


NP1	X	Finishing Finitions Acabados	0	XX	Color Temp. Température couleur Temperatura de color
		1 White Blanc Blanco			27 2700K
		2 Aluminum Aluminium Aluminio			30 3000K
		3 Chrome Cromo			35 3500K
		4 Gold Or Oro			42 4200K
		5 Black Noir Negro			CU Custom
		6 Bronze Bronce			
		9 INOX AISI 316L Steel Acier Acero			

Drivers

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
 Dimming Range: 0.1%
Min. 1/Max. 18 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current
 Dimming Range: 10%
Min. 2/Max. 7 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
 Dimming Range: 10%
Min. 7/Max. 14 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.1

Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 3/Max. 6 Fixtures per Driver

LTEA.2

Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 6/Max. 13 Fixtures per Driver

Lutron Ecosystem

LDE.1

Hi-Lume Ecosystem
 500mA Constant Current
 Dimming Range: 1%
Min. 3/Max. 10 Fixtures per Driver


LDE.2

Hi-Lume Ecosystem Premier
 500mA Constant Current
 Dimming Range: 1%
Min. 11/Max. 16 Fixtures per Driver

Optionals - Accessoires - Accesorios

CS1001

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



CS1006

Recessing box
 Boîtier d'encastrement
 Caja de empotrar

