



# TASK 10


design: Roberto Mantovani

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA (V<sub>I</sub> 18V)**

**Power**  
 Pouissance  
 Potencia  
**10W**



## Photometric diagrams



CCT	Flux	CRI
2700K	860 lm	98+
3000K	912 lm	98+
3500K	949 lm	98+
4000K	985 lm	85
† Dim Warm 1800K-3000K	725 lm	95

## Code Construction

Construction du code produit  
 Construcción del código de producto

**TW<sub>1</sub>X<sub>1</sub>XX<sub>9</sub>1<sub>1</sub>**


TW	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	1
		<b>1</b> White Blanc Blanco		<b>27</b> 2700K		
		<b>2</b> Grey Gris		<b>30</b> 3000K		
		<b>5</b> Black Noir Negro		<b>35</b> 3500K		
				<b>40</b> 4000K		
				<b>DW</b> Dim Warm † @ 420mA		

## Drivers

Alimentateurs  
 Alimentadores

## Series wiring

Câblage en série  
 Cableado en serie



0-10V

### FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming  
 Dimming Range: 0.01%  
**Min 1./Max. 3 Fixtures per Driver**

Phase

### FLEXA-12-500-CC-ELV

12W 500mA Constant Current  
 Dimming Range: 10%  
**Min. 1/Max. 1 Fixtures per Driver**

### FLEXA-23-500-CC-ELV

23W 500mA Constant Current  
 Dimming Range: 10%  
**Min 1./Max. 2 Fixtures per Driver**

Lutron Forward Phase

### LTEA.1

Hi-Lume Forward Phase  
 20W 500mA Constant Current  
 Dimming Range: 1%  
**Min. 1/Max. 2 Fixtures per Driver**

### LTEA.2

Hi-Lume Forward Phase  
 30W 500mA Constant Current  
 Dimming Range: 1%  
**Min. 2/Max. 3 Fixtures per Driver**


Lutron Ecosystem

### PEQ.1

Hi-Lume ECO System  
 20W 500mA Constant Current  
 Dimming Range: 1%  
**Min. 1/Max. 2 Fixtures per Driver**

### PEQ.0

Hi-Lume ECO System Premier  
 20W 500mA Constant Current  
 Dimming Range: 0.1%  
**Min. 1/Max. 2 Fixtures per Driver**

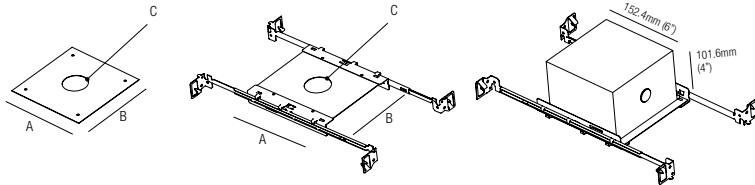

### R01060-WOA

Mounting Plate  
 with 60mm Hole

A - 152.4mm (6")  
 B - 152.4mm (6")  
 C - 60mm (2.36")

### R01060

Mounting Plate  
 with 60mm Hole

A - 152.4mm (6")  
 B - 152.4mm (6")  
 C - 60mm (2.36")

### IC064R01060

Recessed Box for Insulated Ceiling  
 with 60mm Hole

### AT064R01060

Air Tight Recessed Box for Insulated  
 Ceiling with 60mm Hole