


TASK 10

design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_I 18V)

Power
Puissance
Potencia
10W



Photometric diagrams



CCT	Flux	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Tunable White	952 lm	95
2700K	921 lm	98+	2700K-5000K		
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

TW | X | XX | 9 | 1


TW	X	Finishing	XX	Color Temp.	9	1	Beam angle
		Finitions Acabados		Température couleur Temperatura de color			Angle de faisceau Ángulo del haz
	1	White Blanc Blanco		24 2400K		1	10°
	5	Black Noir Negro		27 2700K			
	C	Custom Personnalisée Personalizado		30 3000K			
				35 3500K			
				40 4000K			
			TW	Tunable White			
			CU	Custom Personnalisée Personalizado			

Drivers (Remote)



Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie




For other driver options -
including Lutron, Dali and DMX -
please consult factory

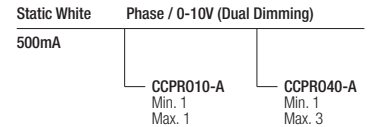

MP-R060


Mounting Plate
with 60mm Hole



T-Bar Installation

RO1060

Mounting Plate
with 60mm Hole

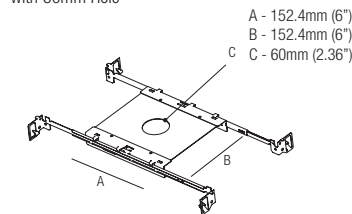


IC Housings

IC064R01060

Recessed Box for
Insulated Ceiling
with 60mm Hole

AT064R01060

Air Tight Recessed
Box for Insulated
Ceiling with
60mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

