


TIO UGR


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
24VDC

Power
Puissance
Potencia
7.5W



Photometric diagrams

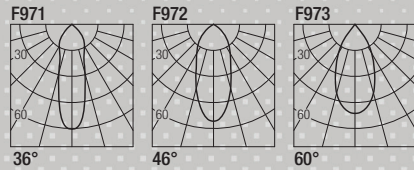

CCT	Flux	CRI
2400K	560 lm	95+
2700K	580 lm	98+
3000K	610 lm	98+
3500K	625 lm	98+
4000K	640 lm	98+

Code Construction

Construction du code produit
Construcción del código de producto

TU1 | X | XX | 9 | X |


TU1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K			S 36°
		5 Black Noir Negro		27 2700K			M 46°
		C Custom Personnalisée Personalizado		30 3000K			W 60°
				35 3500K			D 20+55° (Elliptical)
				40 4000K			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Parallel wiring

Câblage en parallèle
Cableado en paralelo



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White 0-10V/Phase

DLM.100 Min. 1 Max. 12
DLM.60 Min. 1 Max. 7
DLM.30 Min. 1 Max. 3


L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R080
Mounting Plate
with 80mm Hole



T-Bar Installation

RO1080
Mounting Plate
with 80mm Hole



IC Housings

IC064R01080
Recessed Box for
Insulated Ceiling
with 80mm Hole

AT064R01080
Air Tight Recessed
Box for Insulated
Ceiling with
80mm Hole

