


TULIP


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Pouissance
Potencia
10W



Photometric diagrams

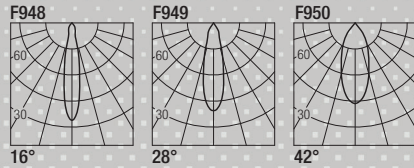

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+



Code Construction

Construction du code produit
Construcción del código de producto

TP1 | X | XX | 9 | X |

TP1	X	Finishing	XX	Color Temp.	9	X	Beam angle
		Finitions Acabados		Température couleur Temperatura de color			Angle de faisceau Ángulo del haz
	1	White Blanc Blanco		24 2400K		S	16°
	5	Black Noir Negro		27 2700K		M	28°
	C	Custom Personnalisée Personalizado		30 3000K		W	42°
				35 3500K			
				40 4000K			
				CU Custom Personnalisée Personalizado			


Drivers (Remote)

Alimentateurs
Alimentadores

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

