



IP RATED DOWNLIGHTS

TYRONE 10

design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación


500mA (V_f 18V)

Power
Puissance
Potencia


10W

FLEXALIGHTING

NORTH AMERICA



Photometric diagrams

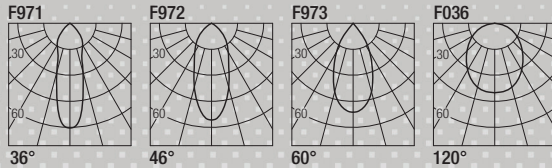

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

TR1 | **XX** | **9** | **X** | **X** | **X**

TR1 Construction du code produit
Construcción del código de producto

XX Color Temp.
Température couleur
Temperatura de color

9 Finitions
Acabados

X Beam angle
Angle de faisceau
Ángulo del haz

24 2400K
27 2700K
30 3000K
35 3500K
40 4000K
DW Dim Warm
CU Custom
Personnalisée
Personalizado


B White
Blanc
Blanco
N Black
Noir
Negro
K COR-TEN
Z INOX
AISI 316L
Steel
Acier
Acero
C Custom
Personnalisée
Personalizado

S 36°
M 46°
W 60°
X 120°


Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring
Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

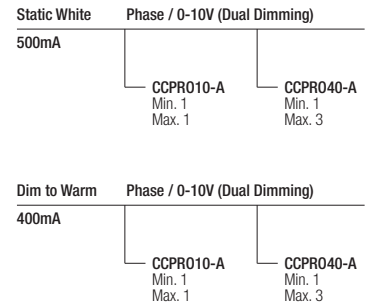

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia





Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation

R02075
Mounting Plate
with 75mm Hole


MP-R075
Mounting Plate
with 75mm Hole

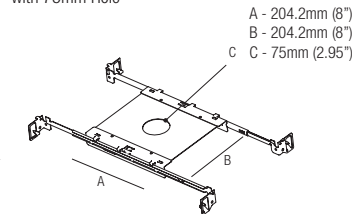

Optionals - Accessoires - Accesorios


CSSL01

Recessing box
Boîtier d'encastrement
Caja de empotrar



DCVL.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



IC Housings

IC086R02075
Recessed Box for
Insulated Ceiling
with 75mm Hole

AT086R02075
Air Tight Recessed
Box for Insulated
Ceiling with
75mm Hole

