
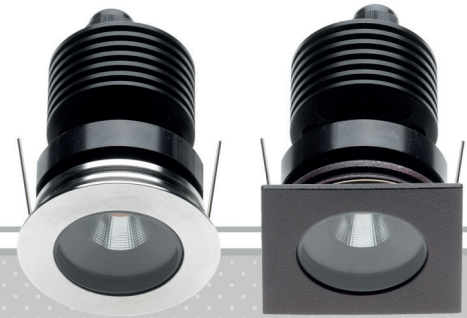


# WOTAN 10


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA (V<sub>f</sub> 18V)**

**Power**  
Puissance  
Potencia  
**10W**

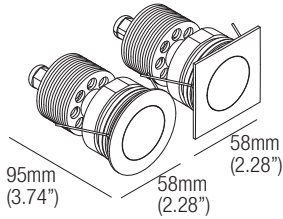

## Photometric diagrams

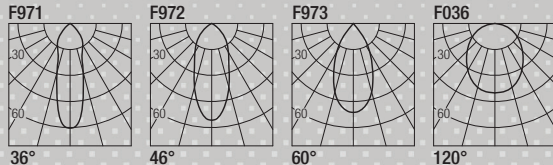

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

## Code Construction

Construction du code produit  
Construcción del código de producto

WT1 | X | XX | 9 | X | X


WT1	X	XX	9	X	X
Shape Forma Forme	Color Temp. Température couleur Temperatura de color	Finishing Finitions Acabados	Beam angle Angle de faisceau Ángulo del haz		
<b>1</b> Round Rond Redondo	<b>24</b> 2400K	<b>B</b> White Blanc Blanco	<b>S</b> 36°		
<b>2</b> Square Carré Cuadrado	<b>27</b> 2700K	<b>N</b> Black Noir Negro	<b>M</b> 46°		
	<b>30</b> 3000K	<b>K</b> COR-TEN	<b>W</b> 60°		
	<b>35</b> 3500K	<b>Z</b> INOX AISI 316L	<b>X</b> 120°		
	<b>40</b> 4000K	<b>Steel</b> Acier			
	<b>DW</b> Dim Warm	<b>Acero</b>			
	<b>CU</b> Custom Personnalisée Personalizado	<b>C</b> Custom Personnalisée Personalizado			

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory


Static White	Phase / 0-10V (Dual Dimming)		
500mA	<table border="1"> <tr> <td>CCPR010-A Min. 1 Max. 1</td> <td>CCPR040-A Min. 1 Max. 3</td> </tr> </table>	CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3
CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3		

Dim to Warm	Phase / 0-10V (Dual Dimming)		
400mA	<table border="1"> <tr> <td>CCPR010-A Min. 1 Max. 1</td> <td>CCPR040-A Min. 1 Max. 3</td> </tr> </table>	CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3
CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3		

## Optionals - Accessoires - Accesorios


### CSDS10

Recessing box  
Boîtier d'encastrement  
Caja de empotrar

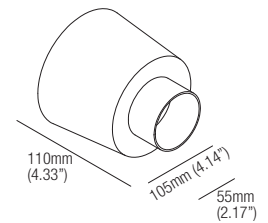

### DCVI.B.1

24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 13W



## LOD1


Low luminance louvre  
Filtre basse luminance  
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture  
Note: le filtre doit être commandé en même temps que l'appareil  
Nota: el filtro debe pedirse junto con la luminaria

## MP-R051


Mounting Plate  
with 51mm Hole



## T-Bar Installation

### R01051

Mounting Plate  
with 51mm Hole

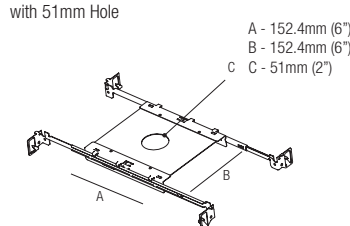

## IC Housings

IC064R01051  
Recessed Box for  
Insulated Ceiling  
with 51mm Hole

AT064R01051  
Air Tight Recessed  
Box for Insulated  
Ceiling with  
51mm Hole

