



IP RATED DOWNLIGHTS

# WOTAN 20

design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación


**500mA** (V<sub>i</sub> 36V)

**Power**  
Puissance  
Potencia


**20W**

# FLEXALIGHTING

NORTH AMERICA

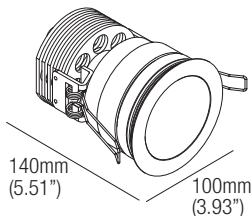

## Photometric diagrams

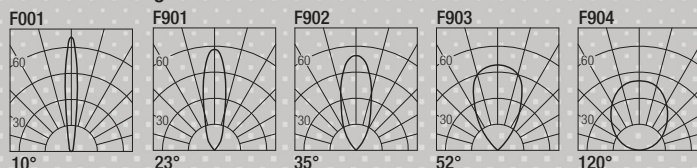

CCT	Flux	CRI
2700K	1659 lm	93
3000K	1752 lm	93
3500K	1873 lm	93
4000K	1925 lm	93

## Code Construction

Construction du code produit  
Construcción del código de producto

### WT2 | XX | 9 | X | X


WT2	XX	Color Temp.	9	X	Finishing	X	Beam angle
		Température couleur Temperatura de color			Finitions Acabados		Angle de faisceau Ángulo del haz
		<b>27</b> 2700K			<b>B</b> White Blanc Blanco		<b>XS</b> 10°
		<b>30</b> 3000K			<b>N</b> Black Noir Negro		<b>S</b> 23°
		<b>35</b> 3500K			<b>K</b> COR-TEN		<b>M</b> 35°
		<b>40</b> 4000K			<b>Z</b> INOX AISI 316L Steel Acier Acero		<b>W</b> 52°
		<b>CU</b> Custom Personnalisée Personalizado			<b>C</b> Custom Personnalisée Personalizado		<b>X</b> 120°

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White Phase / 0-10V (Dual Dimming)


500mA

CCPR040-A  
Min. 1  
Max. 1

## Optionals - Accessoires - Accesorios


### CSDS20

Recessing box  
Boîtier d'encastrement  
Caja de empotrar

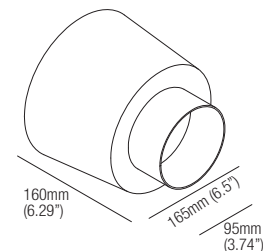

### DCVI.B.2

24VDC Constant Voltage to Constant Current Converter  
0-10V / Phase / Dim to Warm Compatible, 26W



## L0D2


Low luminance louvre  
Filtre basse luminance  
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture  
Note: le filtre doit être commandé en même temps que l'appareil  
Nota: el filtro debe pedirse junto con la luminaria

## MP-R090


Mounting Plate  
with 90mm Hole



## T-Bar Installation

### R02090

Mounting Plate  
with 90mm Hole

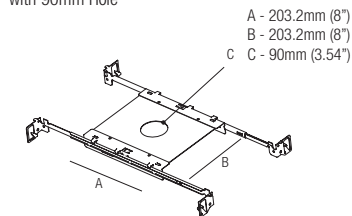

## IC Housings

### IC086R02090

Recessed Box for Insulated Ceiling with 90mm Hole

### AT086R02090

Air Tight Recessed Box for Insulated Ceiling with 90mm Hole

