
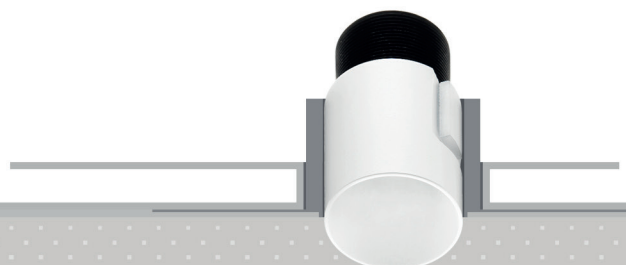


# ZERO R2


design: Roberto Mantovani

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA** ( $V_f$  2.9V)

**Power**  
 Pouissance  
 Potencia  
**1.5W**



## Photometric diagrams

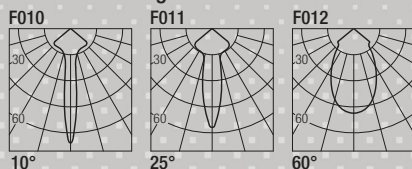


CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

## Accessories - Accessoires - Accesorios

### ZQC001

#### Plasterboard recessing frame

Boîtier d'encastrement pour plaques de plâtre  
 Cajetín para placas de yeso




Hole Cut:  
45mm (1.77")

### ZQC001.BMK

#### Backmount frame


Pierre/bois montage arrière  
 Roca/madera montaje trasero



Hole Cut:  
34mm (1.34")

### MP-R045


Mounting Plate  
with 45mm Hole



### T-Bar Installation

### R01045

Mounting Plate  
with 45mm Hole

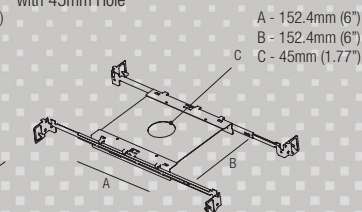


### IC Housings

### IC064R01045

Recessed Box for  
Insulated Ceiling  
with 45mm Hole

### AT064R01045

Air Tight Recessed  
Box for Insulated  
Ceiling with  
45mm Hole





# ZERO Q2


design: Roberto Mantovani

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA** ( $V_f$  2.9V)

**Power**  
 Pouissance  
 Potencia  
**1.5W**

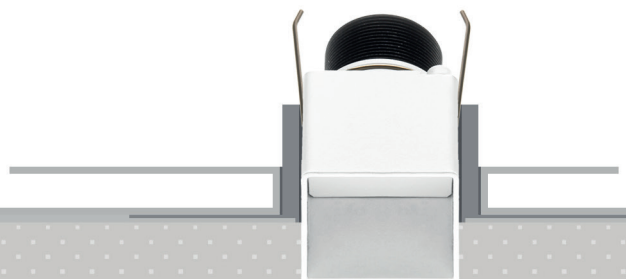

## Photometric diagrams

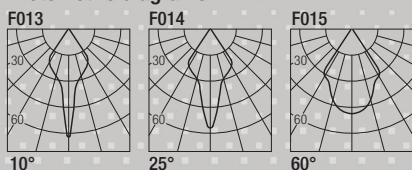


CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

## Accessories - Accessoires - Accesorios

### ZQC002

#### Plasterboard recessing frame


Boîtier d'encastrement pour plaques de plâtre  
 Cajetín para placas de yeso



Hole Cut:  
35mm (1.38")

### MP-Q040


Mounting Plate  
with 40mm Hole



### T-Bar Installation

### Q01040

Mounting Plate  
with 40mm Hole

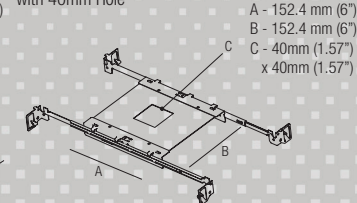


### IC Housings

### IC064Q01040

Recessed Box for  
Insulated Ceiling  
with 40mm Hole

### AT064Q01040

Air Tight Recessed  
Box for Insulated  
Ceiling with  
40mm Hole





## Code Construction

Construction du code produit  
Construcción del código de producto

ZS | X | X | X | XX |


ZS	X	Shape Forma Forme	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	
	1	Round Rond Redondo		1	White Blanc Blanco	0	10°	27	2700K
	2	Square Carré Cuadrado		5	Black Noir Negro	1	25°	30	3000K
	C	Custom Personnalisée Personalizado				2	60°	35	3500K
								40	4000K
								CU	Custom Personnalisée Personalizado

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPR010-A Min. 1 Max. 6	CCPR040-A Min. 1 Max. 18