
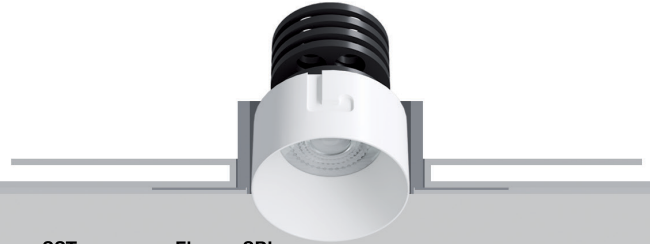


# ZOE 10


design: Rod&Todd

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA** (V<sub>f</sub> 18V)

**Power**  
 Pouissance  
 Potencia  
**10W**



## Photometric diagrams

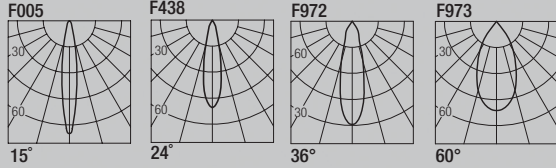

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

## Code Construction

Construction du code produit  
 Construcción del código de producto


**ZE1 | X | XX | 9 | X |**

<b>ZE1</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<ul style="list-style-type: none"> <li><b>1</b> White Blanc Blanco</li> <li><b>5</b> Black Noir Negro</li> <li><b>C</b> Custom Personnalisée Personalizado</li> </ul>		<ul style="list-style-type: none"> <li><b>24</b> 2400K</li> <li><b>27</b> 2700K</li> <li><b>30</b> 3000K</li> <li><b>35</b> 3500K</li> <li><b>40</b> 4000K</li> <li><b>DW</b> Dim Warm</li> <li><b>TW</b> Tunable White</li> <li><b>CU</b> Custom Personnalisée Personalizado</li> </ul>			<ul style="list-style-type: none"> <li><b>N</b> 15°</li> <li><b>S</b> 24°</li> <li><b>M</b> 36°</li> <li><b>W</b> 60°</li> </ul>


## Drivers (Remote)

Alimentateurs  
 Alimentadores

**Series wiring**  
 Câblage en série  
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

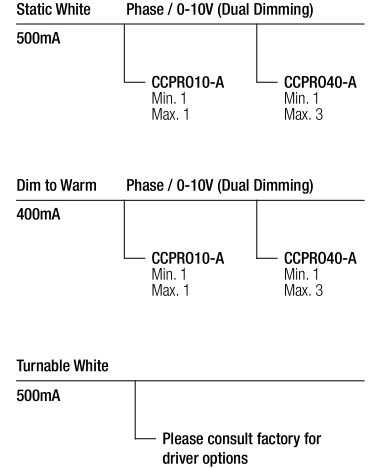


## L101

**Low luminance louvre**  
 Filtre basse luminance  
 Filtro de baja luminancia




**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Nota:** el filtro debe pedirse junto con la luminaria

**MP-R070**  
 Mounting Plate  
 with 70mm Hole

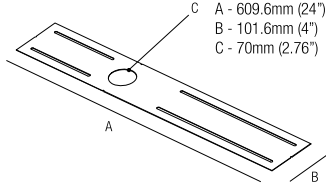

## T-Bar Installation


**R01070**  
 Mounting Plate  
 with 70mm Hole

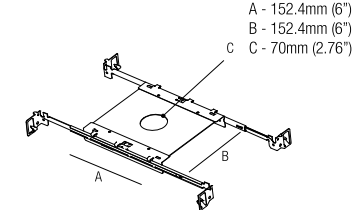

## IC Housings

**IC064R01070**  
 Recessed Box for  
 Insulated Ceiling  
 with 70mm Hole


**AT064R01070**  
 Air Tight Recessed  
 Box for Insulated  
 Ceiling with  
 70mm Hole

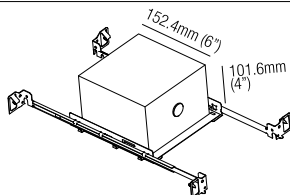

## Accessories - Accessoires - Accesorios

### ZQC003


**Plasterboard  
 recessing frame**  
 Boîtier d'encastrement  
 pour plaques de plâtre  
 Cajetín para placas de yeso



Hole Cut:  
 70mm (2.75")

### ZQC003.BMK

**Backmount frame**  
 Pierre/bois montage arrière  
 Roca/madera montaje trasero



Hole Cut:  
 60mm (2.36")

## Optionals - Accessoires - Accesorios

### DCVI.B.1

24VDC Constant Voltage to  
 Constant Current Converter  
 0-10V / Phase / Dim to Warm  
 Compatible, 13W

