

**AIR 6**  
Pathlight

design Roberto Mantovani

The Air range offers IP67-rated, recessed ground fixtures for grazing lighting of the highest build quality and attention to detail in extremely compact dimensions. The use of advanced waterproofing technology guarantees absolute product reliability. Versions with front in walkable, double powder-coated, anodized aluminium and vehicle-proof AISI 316L stainless steel.

La gamme Air propose des encastrables au sol IP67 pour lumière à ras de très haute qualité constructive, dans lesquels le soin du détail s'unit à des dimensions extrêmement contenues. L'utilisation de technologies d'imperméabilisation avancées garantit une fiabilité absolue du produit. Les versions avec frontal en aluminium traité avec double peinture en poudre sont praticables, les versions avec frontal en INOX AISI 316L sont carrossables.

La gama Air ofrece empotrados de suelo IP67 para emitir luz al ras del suelo de altísima calidad constructiva, en los cuales la atención por los detalles se combina con un tamaño sumamente reducido. El uso de tecnologías avanzadas de impermeabilización garantiza una absoluta fiabilidad del producto. Las versiones con frontal de aluminio tratado con doble barnizado en polvo son peatonales, las versiones con frontal de INOX AISI 316L son transitables.



IP67 Class 2   made in Canada

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
Static White: 500mA (V<sub>9V</sub>)  
Dim To Warm: 250mA (V<sub>18V</sub>)

**Power**  
Puissance  
Potencia  
Static White: 4,5W  
Dim To Warm: 4,5W


**Series wiring**  
Câblage en série  
Cableado en serie

**LED selection**  
Sélection des LED  
Selección del LED  
2-Step MacAdam

**CRI**  
98


**Lumens**  
2400K — 406 lm  
2700K — 517 lm  
3000K — 541 lm  
3500K — 548 lm  
4000K — 541 lm  
DW — 358 lm

**Dimensions**  
Dimensiones



**Code construction**


Construction du code produit  
Construcción del código de producto

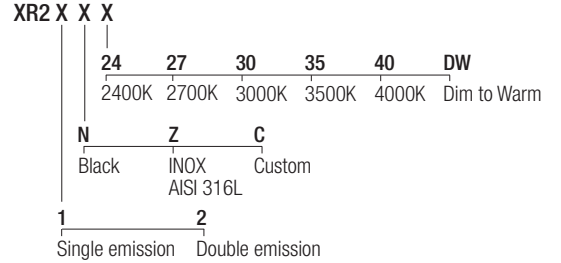


**Accessories**

Accessoires  
Accesorios

**CSXT01**  
Recessing box



**CSXT01.CP**  
Concrete pour housing  
for ingrade



**Static White 500mA drivers**

Static White Alimentateurs 500mA  
Static White Alimentadores 500mA

**CCPRO10A-500** (1..2) IP20  
Dimming: PHASE - 0-10V

**CCPRO40A-500** (1..6) IP20  
Dimming: PHASE - 0-10V

**Dim to Warm 250mA drivers**

Dim to Warm Alimentateurs 250mA  
Dim to Warm Alimentadores 250mA

**CCPRO10A-250-DW** (1..2) IP20  
Dimming: PHASE - 0-10V

**CCPRO40A-250-DW** (1..3) IP20  
Dimming: PHASE - 0-10V