


MOON QX130


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_r 3 x 18V)

Power
Puissance
Potencia
3 x 10W

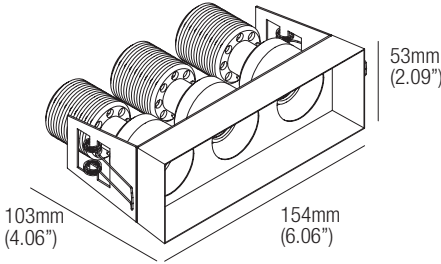

Photometric diagrams

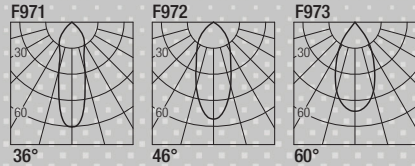

CCT	Flux _(v,3)	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Dim to Warm 1800K-3000K	725 lm	95
2700K	921 lm	98+		Tunable White 2700K-5000K	952 lm
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

MQX13 | X | XX | 9 | X |


MQX13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		24 2400K		S 36°	
		5 Black Noir Negro		27 2700K		M 46°	
		C Custom Personnalisée Personalizado		30 3000K		W 60°	
				35 3500K			
				40 4000K			
				DW Dim Warm			
				TW Tunable White			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)		
500mA	<table border="1"> <tr> <td>CCPRO10-A x3 Min. 1 Max. 1</td> <td>CCPRO40-A Min. 1 Max. 1</td> </tr> </table>	CCPRO10-A x3 Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 1
CCPRO10-A x3 Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 1		
Dim to Warm	Phase / 0-10V (Dual Dimming)		
400mA	<table border="1"> <tr> <td>CCPRO10-A x3 Min. 1 Max. 1</td> <td>CCPRO40-A Min. 1 Max. 1</td> </tr> </table>	CCPRO10-A x3 Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 1
CCPRO10-A x3 Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 1		
Turnable White			
500mA	Please consult factory for driver options		

Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia


3 x LOH1	3 x LOH1B	3 x LOH1C
White Blanc Blanco	Black Noir Negro	Custom Personnalisée Personalizado



Accessories - Accessoires - Accesorios

MQX13Q.BMK


Plasterboard recessing frame
Boîtier d'encastrement pour plaques de plâtre
Cajetín para placas de yeso



Hole Cut:
57mm x 161mm
(2.24" x 6.34")

MQX130Q.WF


Backmount frame
Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
57mm x 161mm
(2.24" x 6.34")


Optionals - Accessoires - Accesorios

3 x DCVI.B.1
24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



MP-X161


Mounting Plate
with 161x57mm Hole



T-Bar Installation

XO3161

Mounting Plate
with 161x57mm Hole

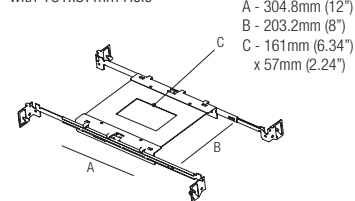

IC Housings

IC127XO3161

Recessed Box for
Insulated Ceiling
with 161x57mm Hole

AT127XO3161

Air Tight Recessed
Box for Insulated
Ceiling with
161x57mm Hole

